


"Y" TYPE CYLIND CONTROL VALVES Y-CCS

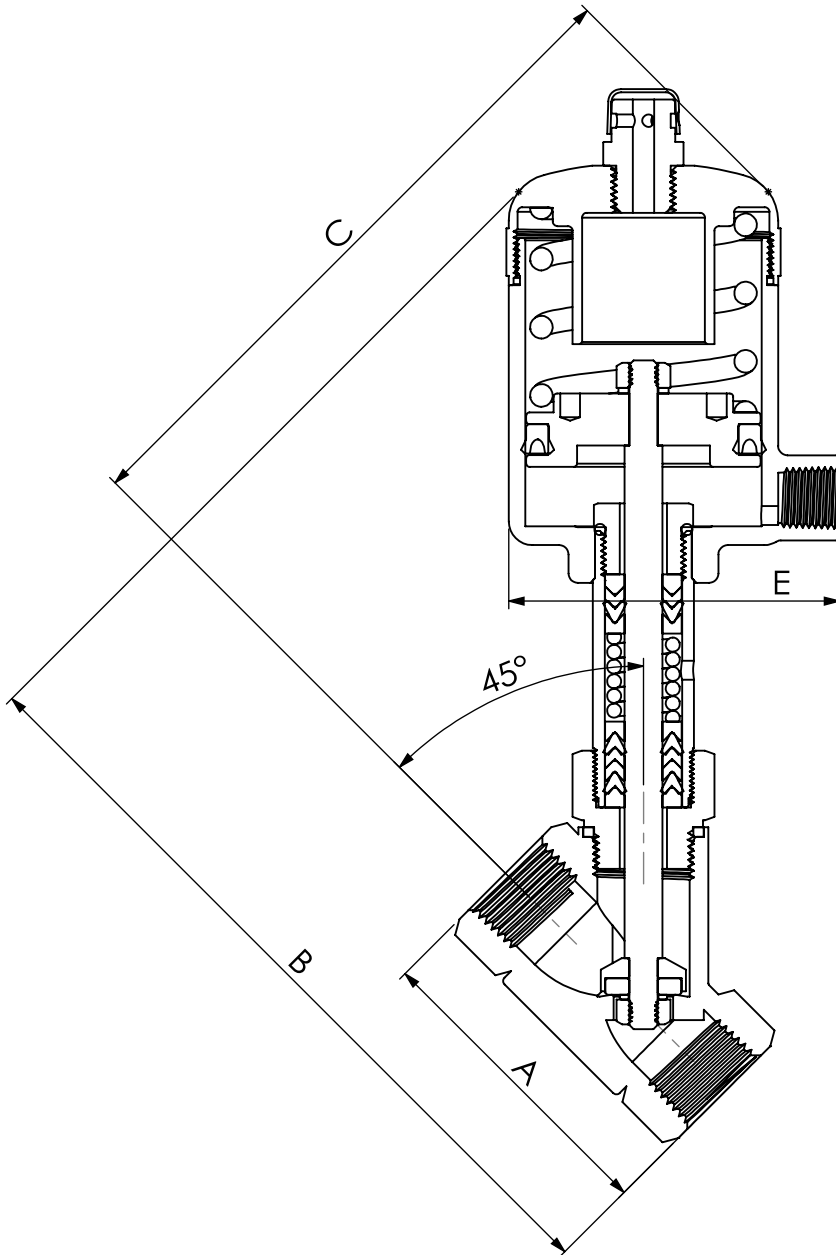

SUITABLE FLUIDS	WATER ,AIR ,STEAM ,OIL
WORKING PRESSURE	0~16 KG/CM ²
WORKING TEMP	0 ⁰ C~180 ⁰ C
VALVE BODY	SCS-14
VALVE STEM	SUS
INNER V-PACKING	TEFLON
SPRING	STAINLESS STEEL
SEAT	SUS
CAP	SUS

SIZE		A	B	C	E	MAXPRESSURE (Kg/cm2)	OPERATING PRESSURE (Kg/cm2)
mm	W						
6	1/4"	65.5	164	140	70	0~16	3~10
10	3/8"	65.5	164	140	70	0~16	3~10
15	1/2"	65.5	164	140	70	0~16	3~10
20	3/4"	75	172	147	70	0~16	3~10
25	1"	90	182	154	70	0~16	3~10